

FREEZ STOP LOW VOLTAGE WIDE

Electrical heating cable for freeze protection or temperature maintenance.

Self-Regulating Heating Cable

- Automatically adjusts heat output in response to increasing or decreasing pipe temperature.
- Can be cut-to-length.
- Inherently temperature safe.
- Suitable for use in safe, hazardous and corrosive areas.
- Full range of controls and accessories available.

DESCRIPTION

FREEZSTOP LOW VOLTAGE WIDE is a light industrial or commercial grade self-regulating heating cable that can be used for freeze protection or temperature maintenance of pipework and vessels in the construction and refrigeration industries.

It can be cut-to-length at site and exact piping lengths can be matched without any complicated design considerations.

FREEZSTOP LOW VOLTAGE WIDE is approved for use in non-hazardous and hazardous areas to world wide standards.

Its self-regulating characteristics improve safety and reliability. FREEZSTOP LOW VOLTAGE WIDE will not overheat or burnout, even when overlapped upon itself. Its power output is self-regulated in response to the pipe temperature.

The installation of FREEZSTOP LOW VOLTAGE WIDE is quick and simple and requires no special skills or tools. Termination, splicing and power connection components are all provided in convenient kits.

INHERENTLY TEMPERATURE-SAFE

“The inherent ability to self-regulate at a temperature level below the maximum product rating and withstand temperature of the insulating materials, without the need for temperature control.”

Other manufacturers self-regulating products are typically limited to a maximum energised temperature, typically 65°C at which point, their retained power output prevent the cable from self-regulating at its own limiting temperatures. All such products require temperature control to ensure their own temperature safety.

Buswires.

Inherently temperature-safe self-regulating matrix.

Thermoplastic electrical insulation.

Continuous conductive covering.

Thermoplastic or fluoropolymer outer jacket.

FLVw-CF is supplied with a black fluoropolymer outer-jacket.



The Heat Tracing Authority™



We Believe there is
Strength in Partnership

Thermal solutions and services for all applications to all industries.

SPECIFICATION

MAXIMUM CONTINUOUS EXPOSURE TEMPERATURE (Power ON): 85°C (185°F)

MAXIMUM PERMISSIBLE EXPOSURE TEMPERATURE (Power OFF): 85°C (185°F)

MINIMUM OPERATING TEMPERATURE: -40°C (-40°F)

MINIMUM INSTALLATION TEMPERATURE: -40°C (-40°F)

POWER SUPPLY: 12 - 24V AC or DC

TEMPERATURE CLASSIFICATION: T6 (85°C)

INGRESS PROTECTION: IP67

WEIGHTS & DIMENSIONS:

Type Ref	Dimensions (mm) +/-0.5	Weight kg/100m	Min Bending radius	Gland Size
FLVw-C	11.75 x 4.75	9.5	30mm	M20
FLVw-CT	12.95 x 5.95	11.8	35mm	M20
FLVw-CF	12.65 x 5.65	12.6	35mm	M20

APPROVAL DETAILS:

ATEX	CML 19ATEX3384
IECEX	CML 19.0127
EAC	EA3C RU C-GB.HA65.B.01383/22
UKEX	CML 21UKEX31144

ORDERING INFORMATION:

Example: **12 FLVw 24 - C T**

Output 12W/m at 10°C ————

FREEZSTOP LOW VOLTAGE WIDE ————

Supply Voltage 12 - 24V AC/DC ————

Metal Braid ————

Thermoplastic Outerjacket ————

ATEX, IECEX & UKEX MARKINGS:

Ex II 2GD
Ex 60079-30-1 IIC T4 Gb
Ex 60079-30-1 IIIC T135°C Db
Ex 60079-30-1 IIC T6 Gb
Ex 60079-30-1 IIIC T85°C Db

EN 60079-0:2018
EN 60079-30-1:2017

ACCESSORIES:

Heat Trace supply a complete range of accessories including termination/splice kits, end seals, junction boxes and controls. Such items carry separate approvals from the heating cables. Use only approved components, as per system certification.

MAXIMUM LENGTH (m) vs. CIRCUIT BREAKER SIZE:

The following circuit details relate specifically to the trace heating of pipework and equipment. For any other application consult Heat Trace.


Cat Reference	Start-up Temperature	24V			
		6A	10A	16A	20A
12FLVw	5°C	8	14	18	-
	0°C	8	12	18	-
	-20°C	6	12	16	-
	-40°C	6	10	14	-
17FLVw	5°C	6	8	14	16
	0°C	4	8	12	14
	-20°C	4	6	10	14
	-40°C	4	6	10	12
30FLVw	5°C	4	6	10	12
	0°C	4	6	8	10
	-20°C	2	4	8	10
	-40°C	2	4	6	8

Residential buildings	Commercial buildings	Industry and Infrastructure
MCB's certified IEC 60898-1	MCB's certified according both IEC 60898-1 & IEC 60947-2	

THERMAL RATINGS:

Nominal output at 12V or 24V when FLVw is installed on thermally insulated carbon steel pipes.

Note: Please refer to TracIT for more precise power output values as a function of pipe temperature.

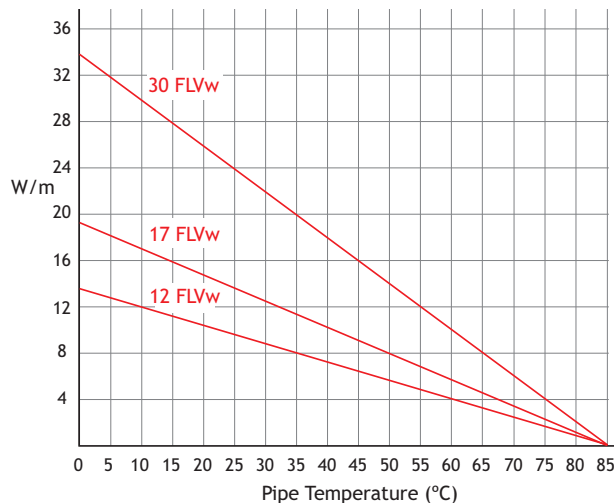

FURTHER INFORMATION:

Please consult the appropriate termination instructions and the Heat Trace Design, Installation & Maintenance Manual (HTDIMM 010) for further details.



Heat Trace Ltd, Mere's Edge, Chester Road, Helsby, Frodsham, Cheshire, WA6 0DJ, England.
Tel: +44 (0)1928 726451
www.heat-trace.com Email: info@heat-trace.com



HTUK Services Ltd, Alexandra Building, Wearfield, Sunderland, SR5 2TA
Tel: 0191 5166686 www.HTUK-Services.co.uk Email: enquiries@ht-uk.com

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only. Heat Trace Ltd makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Users of Heat Trace Ltd products should make their own evaluation to determine the suitability of each such product for specific applications. In no way will Heat Trace Ltd be liable for any damages arising out of the misuse, resale or use of the product.