

Electrical heating cable for freeze protection or temperature maintenance.

FREEZSTOP EXTRA

Self-Regulating Heating Cable

- Automatically adjusts heat output in response to increasing or decreasing pipe temperature.
- Can be cut-to-length.
- Inherently temperature safe.
- Suitable for use in safe, hazardous and corrosive areas.
- Available up to 277V AC/DC.
- Full range of controls and accessories available.

DESCRIPTION

FREEZSTOP EXTRA is an industrial grade, self-regulating heating cable that can be used for freeze protection or temperature maintenance to 100°C.

It can be cut-to-length on site and exact piping lengths can be matched without any complicated design considerations.

FREEZSTOP EXTRA is approved for use in non-hazardous, hazardous and corrosive environments to world wide standards.


Its self-regulating characteristics improve safety and reliability. FREEZSTOP EXTRA will not overheat or burnout, even when overlapped upon itself. Its power output is self-regulated in response to the pipe temperature.

The installation of FREEZSTOP EXTRA is quick and simple and requires no special skills or tools. Termination, splicing and power connection components are all provided in convenient kits.

INHERENTLY TEMPERATURE-SAFE

“The inherent ability to self-regulate at a temperature level below the maximum product rating and withstand temperature of the insulating materials, without the need for temperature control.”

Other manufacturers self-regulating products are typically limited to a maximum energised temperature, typically 65°C at which point, their retained power output prevent the cable from self-regulating at its own limiting temperatures. All such products require temperature control to ensure their own temperature safety.

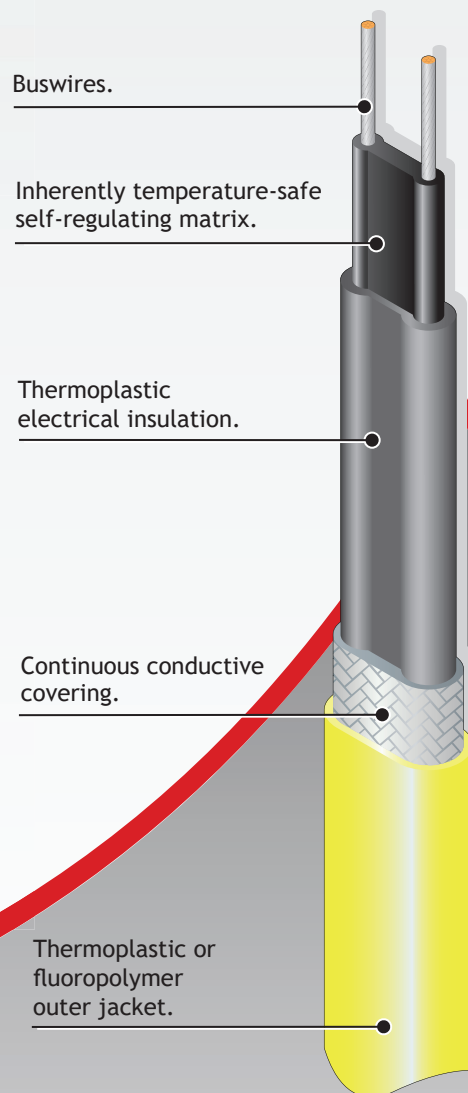

FSE-CF & FSEw-CF are supplied with a black fluoropolymer outer-jacket.



The Heat Tracing Authority™



We Believe there is
Strength in Partnership

Thermal solutions and services for all applications to all industries.

SPECIFICATION

MAXIMUM CONTINUOUS EXPOSURE TEMPERATURE (Power ON): 100°C (212°F)

MAXIMUM PERMISSIBLE EXPOSURE TEMPERATURE (Power OFF): 100°C (212°F)

MINIMUM OPERATING TEMPERATURE: -40°C (-40°F)

MINIMUM INSTALLATION TEMPERATURE: -40°C (-40°F)

POWER SUPPLY: 12 - 277V AC/DC

TEMPERATURE CLASSIFICATION:

up to 45W/m @ nom voltage - T4 (135°C)
>45W/m @ nom 230V powered to 277V - T3 (200°C)

INGRESS PROTECTION: IP67

WEIGHTS & DIMENSIONS:

Type Ref	Dimensions (mm) +/- 0.5	Weight kg/100m	Min Bend radius	Gland Size
FSE..C	11.5 x 4.75	9.5	30mm	M20
FSE..CT	12.7 x 5.95	12.4	35mm	M20
FSE..CF	12.4 x 5.65	13.2	35mm	M20
FSEw..C	14.2 x 5.3	12.9	30mm	M20
FSEw..CT	15.4 x 6.5	17.0	40mm	M25
FSEw..CF	15.1 x 6.2	17.7	40mm	M25

APPROVAL DETAILS:

ATEX	- FSE: CML 19ATEX3379 FSEw: CML 19ATEX3380
IECEX	- FSE: CML 19.0122 FSEw: CML 19.0123
DNV	- TAE00002KA
EAC	- EA3C RU C-GB.HA65.B.01383/22
UKEX	- FSE: CML 21UKEX31136 FSEw: CML 21UKEX31140
CNEx	- FSE + FSEw - CNEx19.1552U
CCC	- 2020312312000118

ORDERING INFORMATION:

Example: Output 45W/m at 10°C **45 FSEw 2 - C T**
FREEZSTOP EXTRA WIDE
Supply Voltage 220 - 277V AC/DC
Metal Braid
Thermoplastic Outerjacket

ATEX, IECEX & UKEX MARKINGS:

Ex II 2GD
Ex 60079-30-1 IIC T4 Gb
FSE Ex 60079-30-1 IIIC T135°C Db
EN 60079-0:2018
EN 60079-30-1:2017

Ex II 2GD
Ex 60079-30-1 IIC T4 Gb
FSEw Ex 60079-30-1 IIIC T135°C Db
Ex 60079-30-1 IIC T3 Gb
Ex 60079-30-1 IIIC T200°C Db
EN 60079-0:2018
EN 60079-30-1:2017

MAXIMUM LENGTH (m) vs. CIRCUIT BREAKER SIZE:


The following circuit details relate specifically to the trace heating of pipework and equipment. For any other application consult Heat Trace.

Cat Reference	Start-up Temperature	230V				
		6A	10A	16A	20A	25A
17FSE	10°C	46	76	120	148	-
	0°C	36	62	98	122	148
	-20°C	24	42	66	82	102
	-40°C	16	28	44	56	68
31FSE	10°C	32	52	82	104	110
	0°C	26	42	68	84	106
	-20°C	16	28	46	56	70
	-40°C	12	18	30	38	48
45FSEw	10°C	24	38	62	76	96
	0°C	20	32	50	64	80
	-20°C	12	22	34	42	52
	-40°C	8	14	22	28	34
60FSEw	10°C	20	35	52	66	82
	0°C	16	28	44	56	70
	-20°C	12	20	32	40	50
	-40°C	8	14	22	28	34

Residential buildings	Commercial buildings	Industry and Infrastructure
MCB's certified IEC 60898-1	MCB's certified according both IEC 60898-1 & IEC 60947-2	

THERMAL RATINGS:

Nominal output at 115V or 230V when FSE is installed on thermally insulated carbon steel pipes.

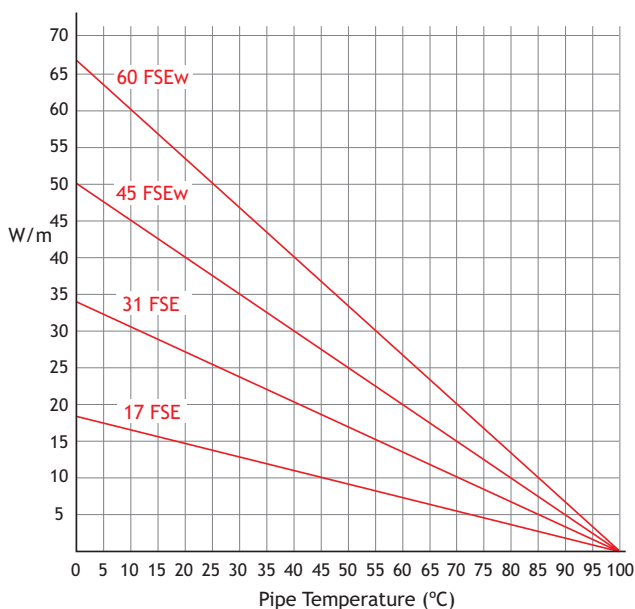

FURTHER INFORMATION:

Please consult the appropriate termination instructions and the Heat Trace Design, Installation & Maintenance Manual (HTDIMM 010) for further details.



Heat Trace Ltd, Mere's Edge, Chester Road, Helsby, Frodsham, Cheshire, WA6 0DJ, England.
Tel: +44 (0)1928 726451
www.heat-trace.com Email: info@heat-trace.com



HTUK Services Ltd, Alexandra Building, Wearfield, Sunderland, SR5 2TA
Tel: 0191 5166686 www.HTUK-Services.co.uk Email: enquiries@ht-uk.com

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only. Heat Trace Ltd makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Users of Heat Trace Ltd products should make their own evaluation to determine the suitability of each such product for specific applications. In no way will Heat Trace Ltd be liable for any damages arising out of the misuse, resale or use of the product.