

FSU/FSUw

250°C

Extremely high temperature self-regulating heating cable.

FailSafe Ultimo

Inherently Temperature-Safe Heating Cable

- Automatically adjusts heat output in response to increasing or decreasing pipe temperature.
- Can be cut-to-length.
- Inherently temperature safe.
- Suitable for use in safe, hazardous and corrosive areas.
- High power outputs to 100W/m at 10°C.
- Full range of controls and accessories available.

DESCRIPTION

FSU is an extremely high temperature self-regulating heating cable, having an exposure limit of 250°C, energised or not.

Easy terminations, cut-to-length.

Safest ever self-regulating product range for extremely high temperature exposure; will not overheat even when exposed to 250°C when energised or switched off as it is inherently temperature-safe.

ATEX, IECEx & UKEX Approved.

INHERENTLY TEMPERATURE-SAFE

“The inherent ability to self-regulate at a temperature level below the maximum product rating and withstand temperature of the insulating materials, without the need for temperature control.”

Similar competitor self-regulating products are typically limited to a maximum energised temperature, typically 120°C at which point, their retained power output prevent the cable from self-regulating at its own limiting temperatures. All such products require temperature control to ensure their own temperature safety.


Buswires.

Inherently temperature-safe self-regulating matrix.

High temperature electrical insulation.

Continuous conductive covering.

Optional corrosion resisting outer jacket. (-F)

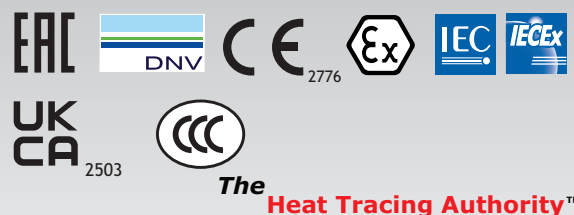

We Believe there is
Strength in Partnership

Thermal solutions and services for all applications to all industries.

SPECIFICATION

MAXIMUM EXPOSURE TEMPERATURE: 250°C (482°F)
(ENERGISED OR SWITCHED OFF)

MINIMUM OPERATING TEMPERATURE: -40°C (-40°F)

MINIMUM INSTALLATION TEMPERATURE: -40°C (-40°F)

POWER SUPPLY: 12 - 277V AC/DC

TEMPERATURE CLASSIFICATION: #

15FSU, 30FSU, 45FSU & 60FSU @ nom 230V - T3 (200°C)
75FSU & 100FSUw @ nom 230V - T2 (300°C)

WEIGHTS & DIMENSIONS:

Type	Dimensions.	Weight	Min Bending	Gland
Ref	(mm) +/-0.5	kg/100m	radius	Size
FSU-N	11.3 x 4.6	11.3	30mm	M20
FSU-NF	12.5 x 5.8	14.6	35mm	M20
FSUw-N	13.6 x 4.8	15.8	30mm	M25
FSUw-NF	14.8 x 6.0	19.5	35mm	M25

APPROVAL DETAILS:

ATEX	- CML 19ATEX3385, CML 19ATEX3386
IECEX	- CML 19.0128, CML 19.0129
DNV	- TAE00002KC
EAC	- EA3C RU C-GB.HA65.B.01383/22
UKEX	- CML 21UKEX31143, CML UKEX31145
*CCC	- 2020312312000120

ORDERING INFORMATION:

Example: **75 FSU 2 - N F**
 Output 75W/m at 10°C
 FSU Heating Cable
 Supply Voltage 220 - 277V AC/DC
 Metal Braid
 Outer Sheath, Fluoropolymer

ACCESSORIES:

Heat Trace supply a complete range of accessories including termination/splice kits, end seals, junction boxes and controls. Such items carry separate approvals from the heating cables. Use only approved components, as per system certification.

FURTHER INFORMATION:

Please consult the appropriate termination instructions and the Heat Trace Design, Installation and Maintenance Manual (HTDIMM 010) for further details.

INGRESS PROTECTION: IP67

ATEX, IECEX & UKEX MARKINGS:

Ex II 2 GD
 Ex 60079-30-1 IIC T3 or T2# Gb
 Ex 60079-30-1 IIC T200°C or T300°C Db
 EN 60079-0: 2018
 EN 60079-30-1: 2017

*denotes FSU only.

MAXIMUM LENGTH (m) vs. CIRCUIT BREAKER SIZE:

The following circuit details relate specifically for the trace heating of pipework and equipment. For any other application consult Heat Trace.


Cat	Environmental	10A	16A	20A	32A	50A
Reference	Start-up Temp.					
15FSU	10°C	76	122	154	172	172
	0°C	70	112	140	172	172
	-20°C	62	98	122	172	172
	-40°C	52	82	102	164	172
30FSU	10°C	52	82	102	122	122
	0°C	46	74	92	122	122
	-20°C	40	66	82	122	122
	-40°C	34	54	68	110	122
45FSU	10°C	38	62	76	100	100
	0°C	34	56	70	100	100
	-20°C	30	50	62	98	100
	-40°C	22	34	44	70	100
60FSU	10°C	30	50	62	86	86
	0°C	28	44	56	86	86
	-20°C	20	32	40	62	86
	-40°C	12	18	24	38	60
75FSU	10°C	22	34	44	70	76
	0°C	16	26	34	54	76
	-20°C	12	18	24	38	60
	-40°C	8	12	14	22	36
100FSUw	10°C	18	30	36	58	84
	0°C	18	28	34	56	84
	-20°C	16	24	30	50	76
	-40°C	14	22	28	46	70

For use with Type C circuit breakers to IEC 60898

These circuit lengths may be exceeded dependant on specific design parameters.

THERMAL RATINGS:

Nominal output at 230V when FSU is installed on thermally insulated carbon steel pipes.

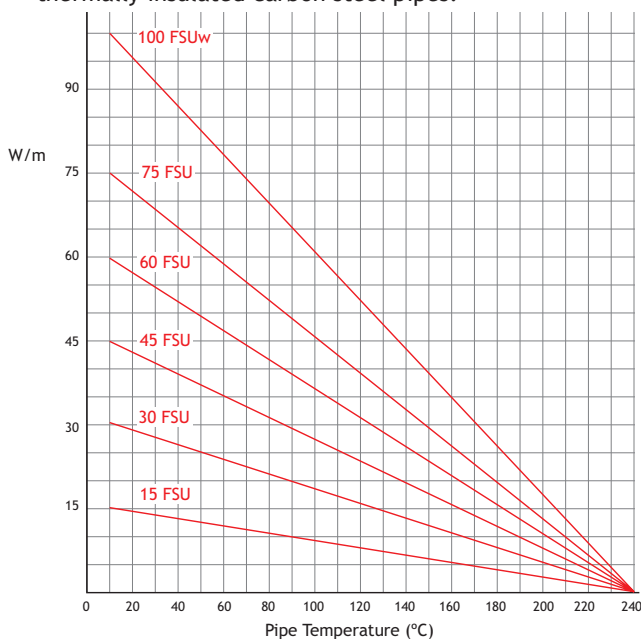

Heat Trace Ltd, Mere's Edge, Chester Road, Helsby, Frodsham, Cheshire, WA6 0DJ, England.

Tel: +44 (0)1928 726451

www.heat-trace.com

Email: info@heat-trace.com



HTUK Services Ltd, Alexandra Building, Wearfield, Sunderland, SR5 2TA

Tel: 0191 5166686

www.HTUK-Services.co.uk

Email: enquiries@ht-uk.com

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only. Heat Trace Ltd makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Users of Heat Trace Ltd products should make their own evaluation to determine the suitability of each such product for specific applications. In no way will Heat Trace Ltd be liable for any damages arising out of the misuse, resale or use of the product.