

HTS1F

200°C

Electrical heating cable for the heating of long pipelines.

LONGLINE

High Efficiency Series Resistance
Single Conductor Heating Cable

- Circuit lengths up to 5km.
- Single supply point - minimises supply cabling costs.
- Available up to 1000V AC/DC 3 phase.
- Power outputs up to 50W/m.
- Easy installation in convenient lengths.
- Full range of controls and accessories available.

DESCRIPTION

LONGLINE HTS1F is a series resistance, single conductor heating cable supplied in multiples of 3 cables for configuring with a 3 phase heating system. It is used for freeze protection or process temperature maintenance of long pipelines.

A typical application is the temperature maintenance of crude or fuel oils in above ground and buried transfer lines.

LONGLINE minimises the number of electrical supplies needed and so minimises supply cabling and distribution equipment costs. Circuits are often fed at the pipe ends only.

The single conductor is sheathed with silicone rubber for flexibility.

A continuous conductive cover and over-jacket can be provided for additional mechanical protection or for grounding purposes.

The number of heating cables and their conductor sizes are designed to produce the desired output for the circuit length required. The LONGLINE heaters are connected directly to the 3 phase mains voltage or, when required, to a step-up transformer.

The large heated surface of LONGLINE'S flat foil construction results in lower operating temperatures than equivalent round conductor constructions thereby improving safety and system life. The high efficiency produces high power capability (up to 50W/m) per cable.

LONGLINE cable may be straight run to above ground pipes. For buried lines, cables are usually drawn into channel raceways within a pre-insulated pipeline system.

Cable is provided in convenient lengths for series connection at site.

Heating foil conductor.

High temperature electrical insulation.

Continuous conductive covering of tinned copper/nickel plated copper braid (-C).

Continuous metal jacket (-A).

Optional over jacket, silicone rubber or fluoropolymer for added corrosion resistance, scuff/anti friction jacket for pulling into tubes/channels.



The Heat Tracing Authority™



We Believe there is
Strength in Partnership

Thermal solutions and services for all applications to all industries.

SPECIFICATION

MAXIMUM CONTINUOUS EXPOSURE TEMPERATURE (Power ON): 200°C (392°F)

MAXIMUM PERMISSIBLE EXPOSURE TEMPERATURE (Power OFF): 200°C (392°F)

MINIMUM OPERATING TEMPERATURE: -80°C (-112°F)*

MINIMUM INSTALLATION TEMPERATURE: -40°C (-40°F)

POWER SUPPLY: up to 600V AC/DC single phase
up to 1000V AC/DC 3 phase
according to application requirements

POWER OUTPUT: up to 50W/m by design
according to application requirements

TEMPERATURE CLASSIFICATION:

(See workpiece temperature tables)

APPROVAL DETAILS: - Specific constructions have the following approvals

ATEX - CML 19ATEX3388X
IECEX - IECEX CML 19.0131X
EAC* - EAEC RU C-GB.M062.B.01122/19
UKEX - CML 21UKEX31147X

CONSTRUCTION:

Heating Conductors: Sized to suit application
Max Conductor size: 16mm² - 60mm²
Insulation: Silicone Rubber
Continuous Conductive Covering: Braid/Aluminium
Over Jacket: Silicone or Fluoropolymer

ORDERING INFORMATION:

Example: HTS 1FA - A S /16

Silicone Rubber Sheath
One heating conductor
(1F) Copper or (1FA) - Aluminium
Continuous conductive cover
(C) Metal Braid or (A) Continuous Metal jacket
Optional over-jacket
(F) Fluoropolymer
or (S) Silicone
Nominal cross section (mm²)


MAXIMUM PIPE / WORKPIECE TEMPERATURE:

The surface of the heater must not exceed the maximum withstand temperature of its constructional materials or the Temperature Classification (if installed in a hazardous area). This is ensured by limiting the pipe or workpiece temperature to a safe level either by design calculation (a Stabilised Design) or by means of temperature controls.

For worst case conditions, the temperature of steel pipes should be limited to the following levels.

Cat Ref	Nom. Output (W/m)	Area Classification						Safe
		Hazardous						
		T6	T5	T4	T3	T2	T1	
HTS1F-x	10	47	66	107	181	200	200	200
	20	–	32	75	157	191	191	191
	30	–	–	41	132	163	163	163
	40	–	–	–	108	133	133	133
	50	–	–	–	76	97	97	97
HTS1F-xS	10	57	73	112	181	200	200	200
	20	37	53	93	166	180	180	180
	30	–	31	73	152	157	157	157
	40	–	–	51	127	127	127	127
	50	–	–	27	92	92	92	92
HTS1F-xF	10	57	73	112	181	200	200	200
	20	37	53	93	166	180	180	180
	30	–	31	73	152	157	157	157
	40	–	–	51	127	127	127	127
	50	–	–	27	92	92	92	92

TYPICAL ARRANGEMENT:

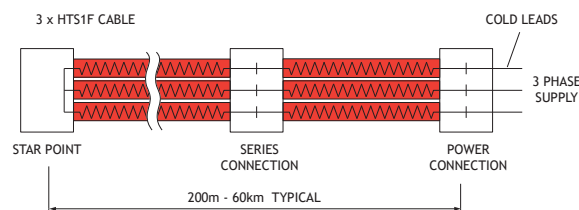

CIRCUIT PROTECTION:

Circuit breakers, switch gear and supply cabling should be sized to cater for cold start-up conditions. Heat Trace Ltd will advise operating and start-up loads.

ACCESSORIES:

Heat Trace supply a complete range of accessories including termination/splice kits, end seals, junction boxes, controls and fixing tape. These items are recommended for the correct operation of LONGLINE products.

LONGLINE - A COMPLETE SYSTEM:

Reliability of the heating system is usually paramount. LONGLINE cables form only part of a high integrity LONGLINE heating system including power control, temperature control and circuit health monitoring/ alarm equipment - all specifically developed and produced by Heat Trace Ltd.



Heat Trace Ltd, Mere's Edge, Chester Road, Helsby, Frodsham, Cheshire, WA6 0DJ, England.
Tel: +44 (0)1928 726451
www.heat-trace.com Email: info@heat-trace.com



HTUK Services Ltd, Alexandra Building, Wearfield, Sunderland, SR5 2TA
Tel: 0191 5166686 www.HTUK-Services.co.uk Email: enquiries@ht-uk.com

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only. Heat Trace Ltd makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Users of Heat Trace Ltd products should make their own evaluation to determine the suitability of each such product for specific applications. In no way will Heat Trace Ltd be liable for any damages arising out of the misuse, resale or use of the product.