

Flexible RTD Sensor

(R100 / RTD)

Flexible sensor for temperature sensing of tanks and vessels.

R Series Solution

- Available for use in safe and hazardous areas.
- Enclosures suitable for Gas Group IIA, IIB and IIC.
- Ingress Protection IP66.
- Full range of accessories and termination kits available.

INTRODUCTION

As part of our commitment to innovation in the industry, Heat Trace Ltd is offering an Exd solution.

This flexible RTD sensor assembly is equipped with a 3 wire Pt100 RTD temperature sensor with simplex configuration.

The Pt100 & sensor provides a flexible solution in terms of using electronic temperature controllers which can process signals from Pt100.

Flexible RTD sensor assemblies are ideal for sensing the temperature of vessels / tanks or equipment with uneven surfaces or surfaces with higher insulation thickness where it is difficult to install RTD assembly with a rigid stem. The sensor is secured to the surface with our range of adhesive aluminium tapes, dependant on system temperatures.

The enclosure is made of high grade, cast aluminium and painted with RAL 7035 paint.



The Heat Tracing Authority™



We Believe there is
Strength in Partnership

Thermal solutions and services for all applications to all industries.

SPECIFICATION

ENCLOSURE:

Material:	Standard Copper Free Aluminium
Paint shade:	RAL 7035, light grey
Protection:	EX (db) - IP66
Rated voltage:	1.1kV AC / DC
Area suitability:	Zone 1 / Zone 2, IIA / IIB / IIC
Cable entries:	1 off (for control cable)
Earthing:	Internal and external earthing
Sensor Type:	3 wire Pt100 Simplex (standard)
Temperature measuring range:	-100°C to 600°C
Sensor lead protection:	Stainless steel conduit
Sensor lead length:	Standard 1.5m
Number of terminals:	3 off (1 live, 1 Neutral & 1 Earth)
Size of terminals:	2.5mm ²

APPROVAL DETAILS:

ATEX	-	ETL 23ATEX0270X
IECEX	-	IECEX ITS 19.0019X
UKCA	-	ITS 23UKEX0687X

EQUIPMENT MARKING:

IECEX:

Gas: Ex db IIC T6/T5 Gb
Dust: Ex tb IIIC T85°C/T100°C Db
-60°C or -20°C < Ta < +45°C / +60°C / +75°C

ATEX/UKCA:

Gas: Ⓢ II 2 G D Ex db IIC T6/T5 Gb
Dust: Ⓢ II 2 G D Ex tb IIIC T85°C/T100°C Db
-60°C or -20°C < Ta < 45°C / +60°C / +75°C

STANDARD KIT CONTENT:

- Junction box with specified entries fitted with with sensor, Din rail, terminal & accessories (terminal, end plate, stopper, shorting link, terminal marker which ever applicable).
- 2 off stainless steel earthing stud.
- O ring, grub screw, allen key for grub screw.
- Stainless steel certification plate.
- Stainless steel tag plate.
- 2 off M8x12 Stainless nut, bolt and washer set for mounting
- Cable entry marking sticker.
- External earthing stud is fitted with PVC sleeved copper lug.
- Earthing sticker
- Instruction manual
- Wiring diagram

SAFE USE:

Only certified cable glands & accessories of required Ex protection shall be used.

Each entry shall have no more than one thread adaptor. A stopping plug shall not be used with a thread adaptor.

If holes or unused cable entry are left open, explosion protection can no longer be guaranteed.





Close open holes using stopping plugs approved for required type of protection.

ACCESSORIES:

Heat Trace Ltd supply a complete range of accessories including termination/splice kits, end seals, junction boxes and controls.

FLEXIBLE RTD SENSOR

PART NO. : R100/RTD/F

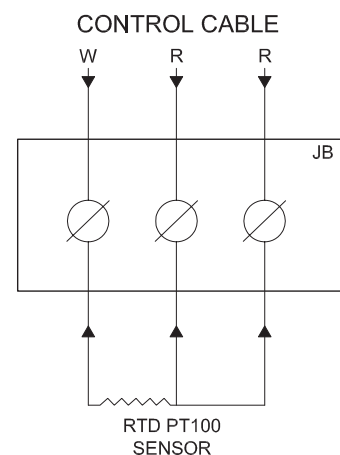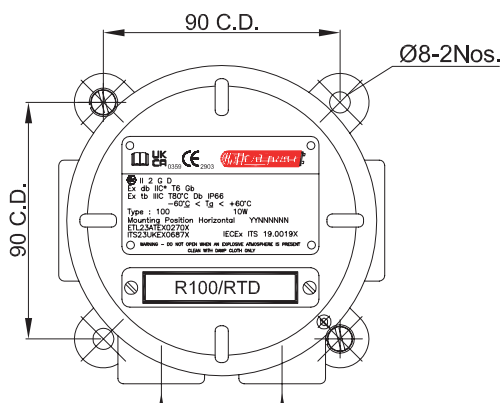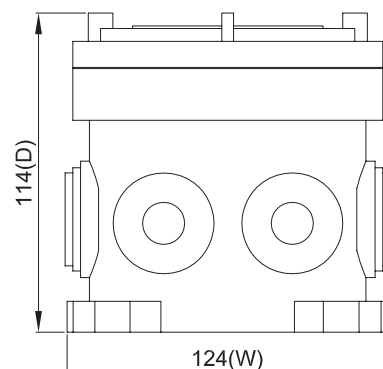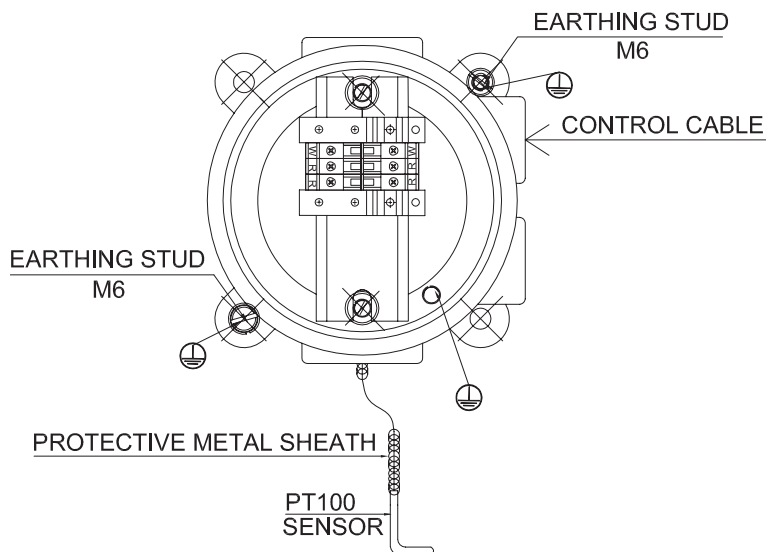

Description	Part number	Entry size for control cable	Sensor length (M)
Flexible RTD Sensor	R100/RTD/F	M20	1.5

Note: 1) All dimensions are in mm with tolerance of $\pm 5\%$.
2) External earthing stud is fitted with PVC sleeved copper lug.



Heat Trace Ltd, Mere's Edge, Chester Road, Helsby, Frodsham, Cheshire, WA6 0DJ, England.
Tel: +44 (0)1928 726451
www.heat-trace.com Email: info@heat-trace.com



HTUK Services Ltd, Alexandra Building, Wearfield, Sunderland, SR5 2TA
Tel: 0191 5166686 www.HTUK-Services.co.uk Email: enquiries@ht-uk.com

The information given herein, including drawings, illustrations and schematics are intended for illustration purposes only. Heat Trace Ltd makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Users of Heat Trace Ltd products should make their own evaluation to determine the suitability of each such product for specific applications. In no way will Heat Trace Ltd be liable for any damages arising out of the misuse, resale or use of the product.